CBT 50LA-LS Line Array Column Loudspeaker with Eight 50 mm (2 in) Drivers

Beamwidth

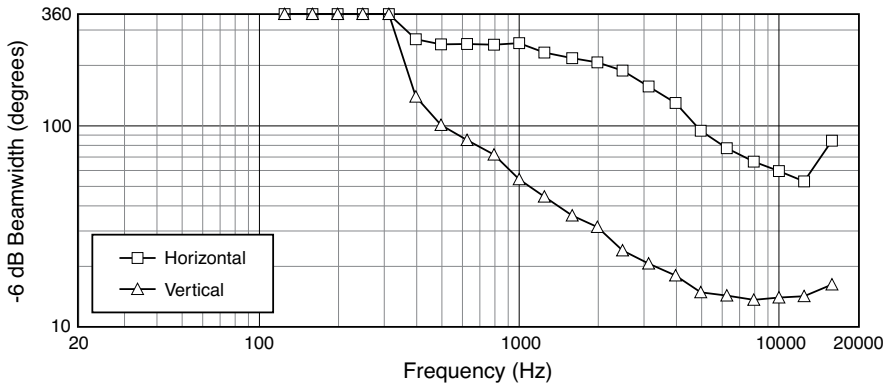

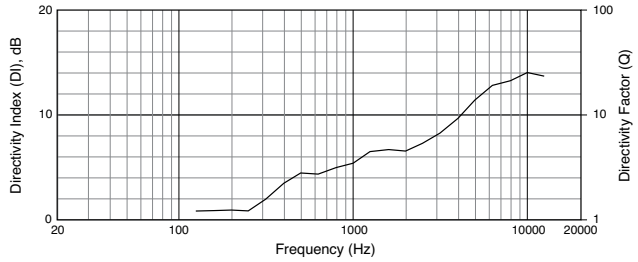

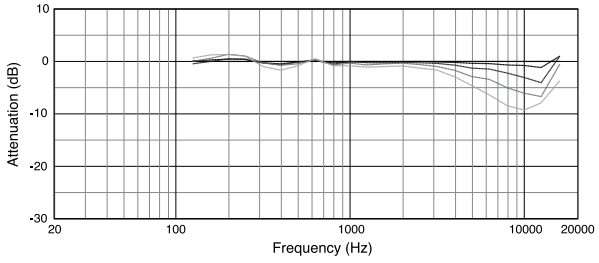

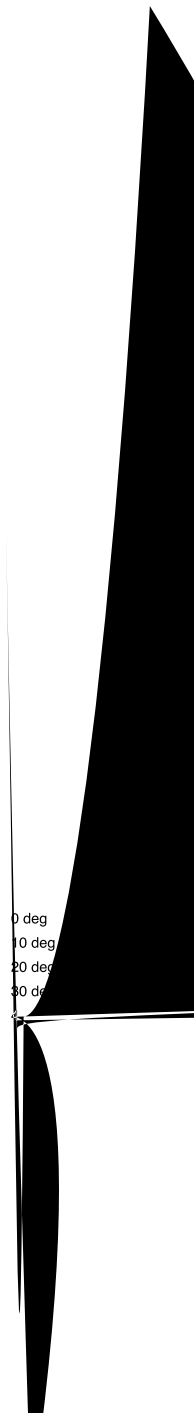

CBT 50LA-LS Line Array Column Loudspeaker with Eight 50 mm (2 in) Drivers

Horizontal 1/3 Octave Polars

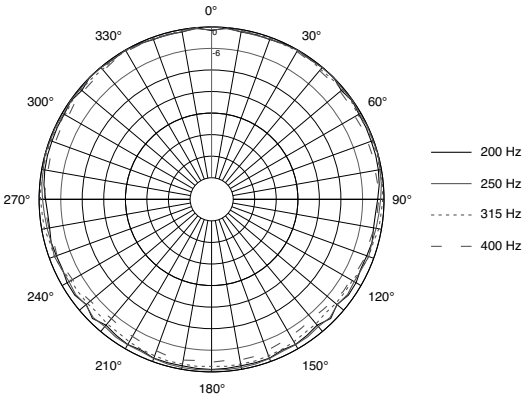

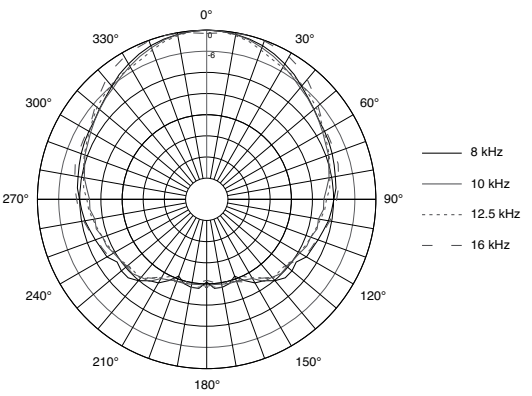

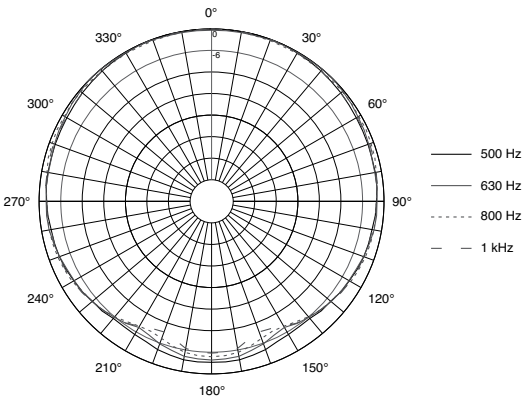

One-Third Octave Contributions to Maximum SPL (per EN54-24):

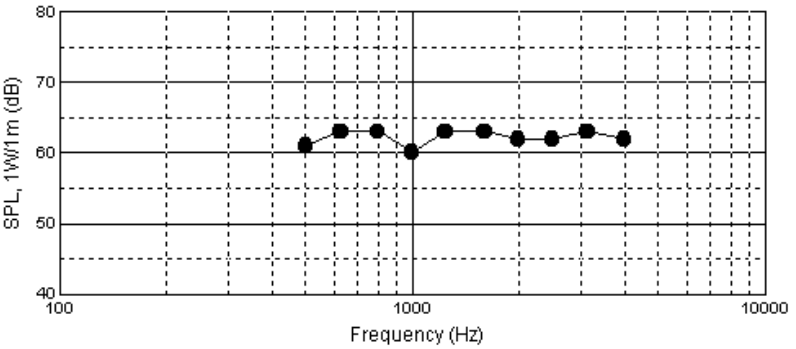

Contribution of each mid-range one-third-octave frequency band to the SPL (per EN54-24) when system is driven to Rated Maximum SPL (111 dB @ 1m; 99 dB @ 4m - in Music mode) using specified broadband pink-noise signal, 60W tap setting, 1m (Contribution figures: 500 Hz = 61 dB; 630 Hz = 63 dB; 800 Hz = 63 dB; 1000 Hz =60 dB; 1250 Hz = 63 dB; 1600 Hz =63 dB; 2000 Hz =62 dB; 2500 Hz =62 dB; 3150 Hz =63 dB; 4000 Hz = 62 dB).

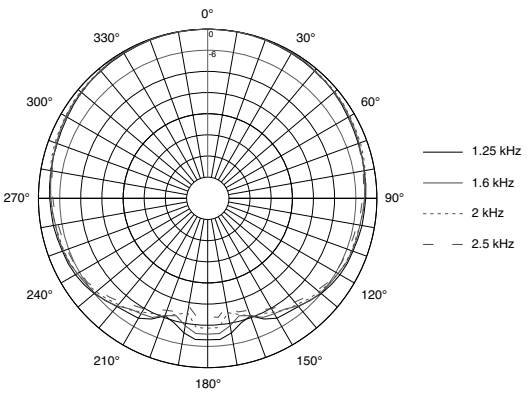

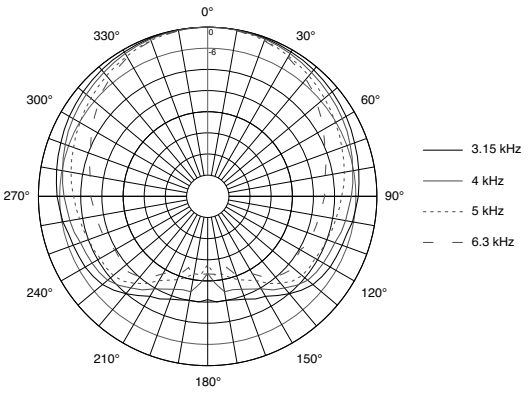

CBT 50LA-LS Line Array Column Loudspeaker with Eight 50 mm (2 in) Drivers

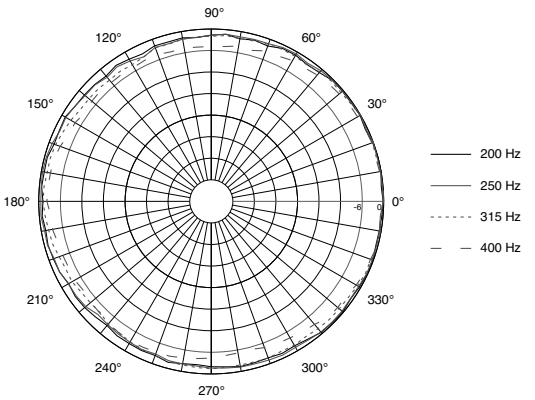

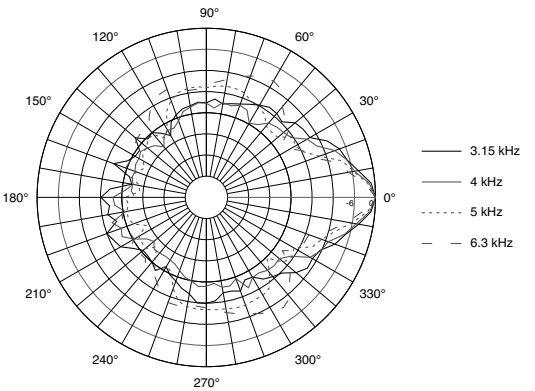

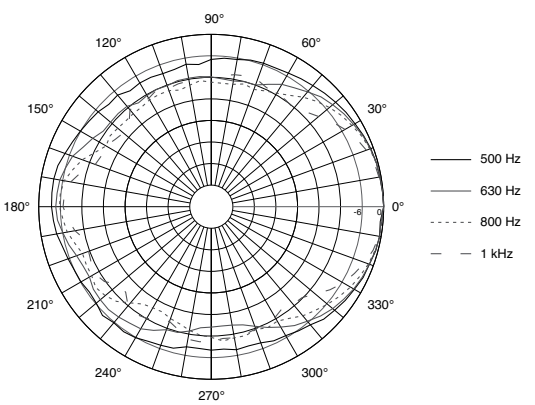

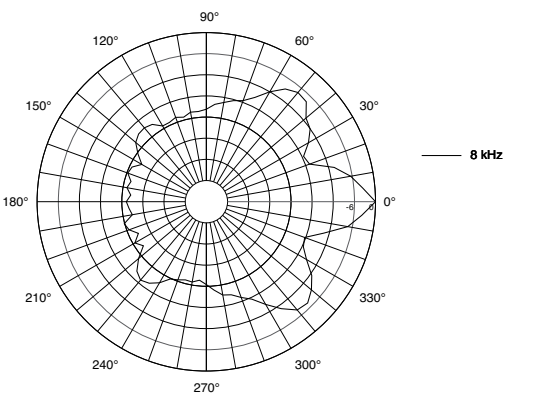

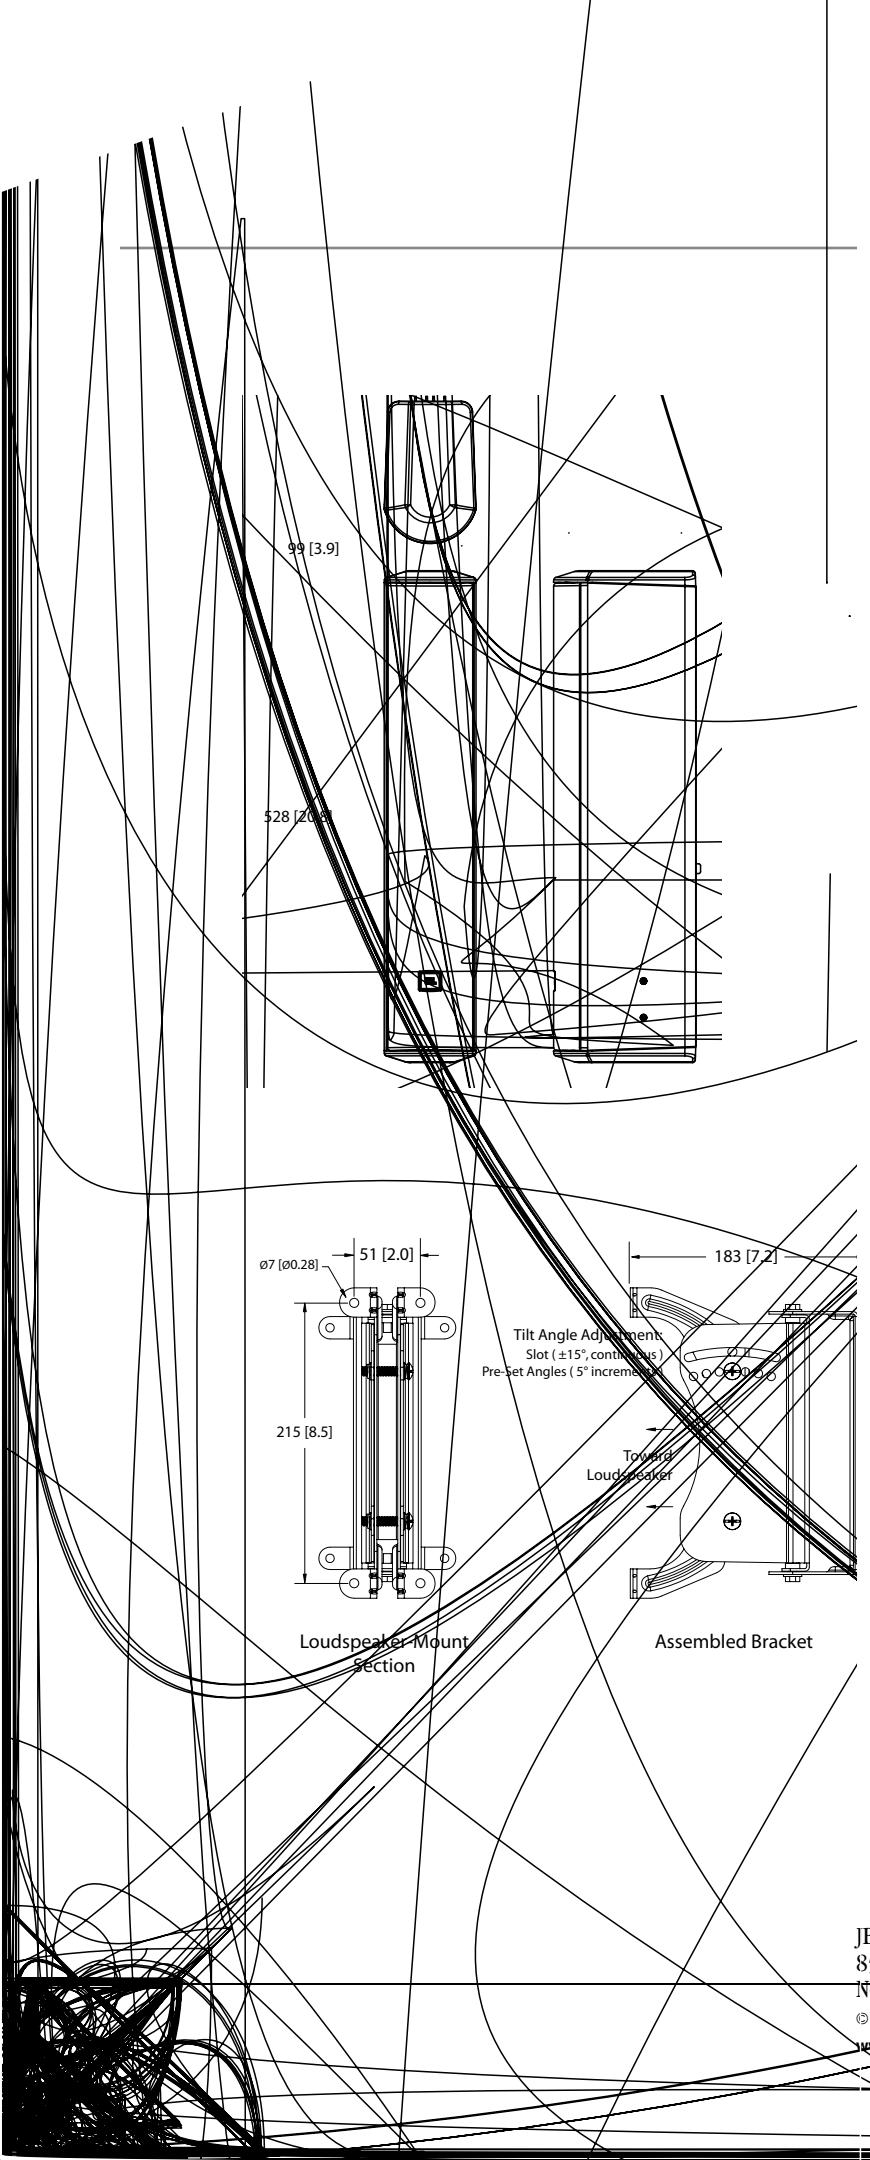

Loudspeaker Mount Section

Assembled Bracket

JBL Profe nal
8500 Bal Boulevard, P.O.
Northrid alifornia 91329 U.

© Copyrigh 3 JBL Professional
www.jblpro