




- 48
- 24 XLR
- 2 1/4" TRS
- 1 3.5mm
- 36
- 12 AUX +
- PAFL
- 16 14 XLR+2 1/4" TRS
- AES
- XLR
- 1/4" TRS
- Slink dSnake DX
- gigaACE 64X64
- I/O
- Dante/Waves
- 8
- 8 DCA
- 8 FX FX
- DEEP
- RackFX
- 7"
- 16
- 4
- 
- 24+1 6
- 24 LCD GEO
- /
- 31
- / /
- show 300 Scene
- Channel Safes Global
- FX
- SQ-Drive USB /
- USB Scenes Libraries Shows
- 32x32 USB / Mac / PC
- DAW USB TCP/IP MIDI
- iPad Android
- ME
- / /



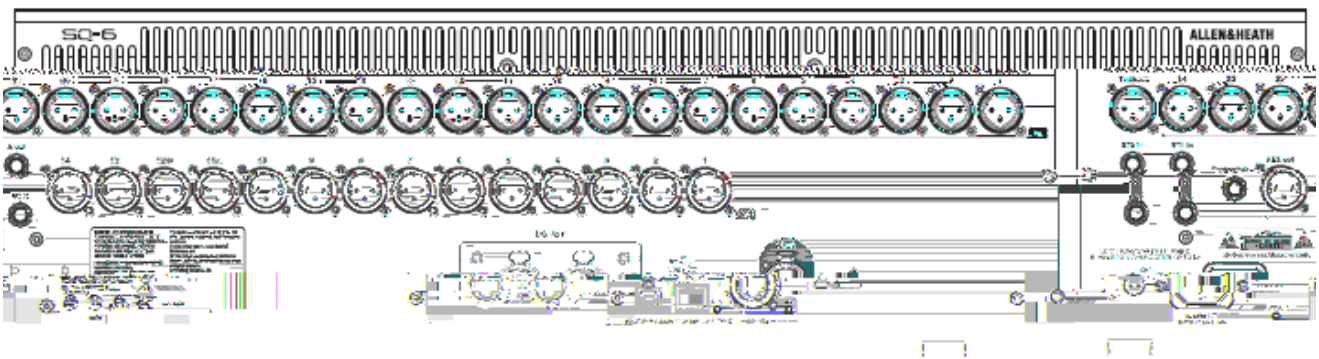

16

MMC / /DCA/ SQ-Drive 4

LED Tap Tempo Scene LCD

LR PAFL

PAFL

USB A / /

USB-B

USB 2.0

MIDI DAW

XLR AES/EBU

100 Mbit/s Cat5

FX

MIDI 端 TCP/IP 平板

LAN

RTA

Show USB

Allen & Heath DEEP 300

Scene Safes

8 FX /

FX/ /

8 DCA 8

Automatic Mic Mixer

DCA 75W 100-240V 50/60Hz

3 IEC

5-35

FX RTA

Allen & Heath SQ-





	XLR		100mm
	-60 +0 dBu		7" 800x480
	-20dB		24 RGB
	0dB +60dB 1dB	/DCA	8 SQ-5 16 SQ-6
	+30dBu		8/8
	>5k	MIDI	TCP/IP MIDI
THD+N, Unity gain 0dB	0.002% -92dBu (20Hz-20kHz, AES @0dBu 1kHz)		TCP/IP USB B *
THD+N, Mid gain+30dB	0.003% -91dBu (20Hz-20kHz, AES @-30dBu INPUT 1kHz)		/
	+48V (+3V / -2V)		
		1-48	
ST1, ST2	1/4" TRS	USB	SQ-Drive USB B
ST3	3.5mm		
(ST1, ST2 /ST3)	+4dBu ST1, ST2 / 0dBu ST3		



14 kg (30.9 lbs)

x x

638 x 514.9 x 198 mm (25.1" x 20.3" x  
7.8")

820 x 680 x 360 mm (32.3" x 26.8" x  
14.2")

13.3 kg (29.3 lbs)

17.3 kg (38.1 lbs)

\* v1.1